





# 7'x8' UTILITY VAULT

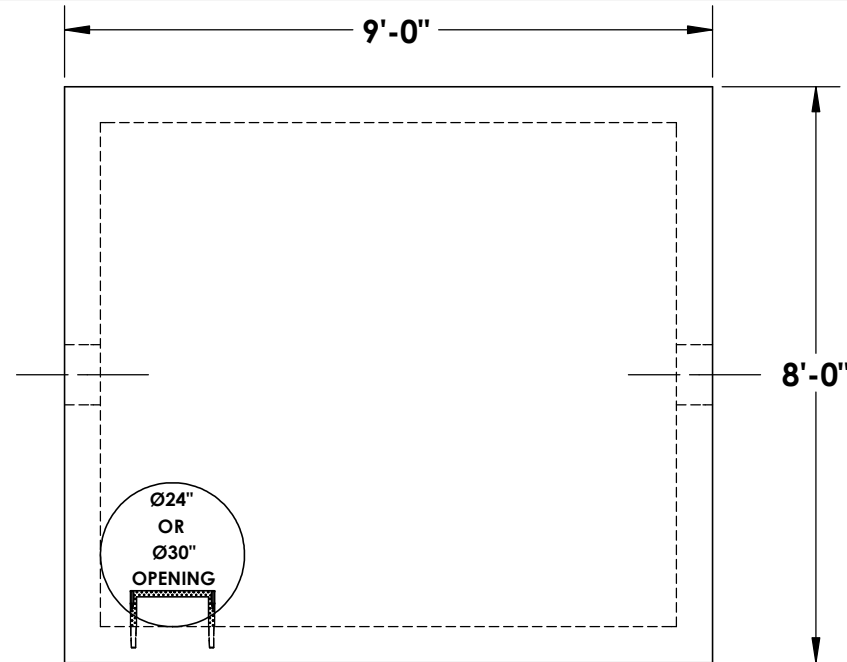

~ COVER  
5,165# (1.28 CU/YDS)

~ SECTION  
7,800# (1.93 CU/YDS)

~ BASE  
7,700# (1.90 CU/YDS)

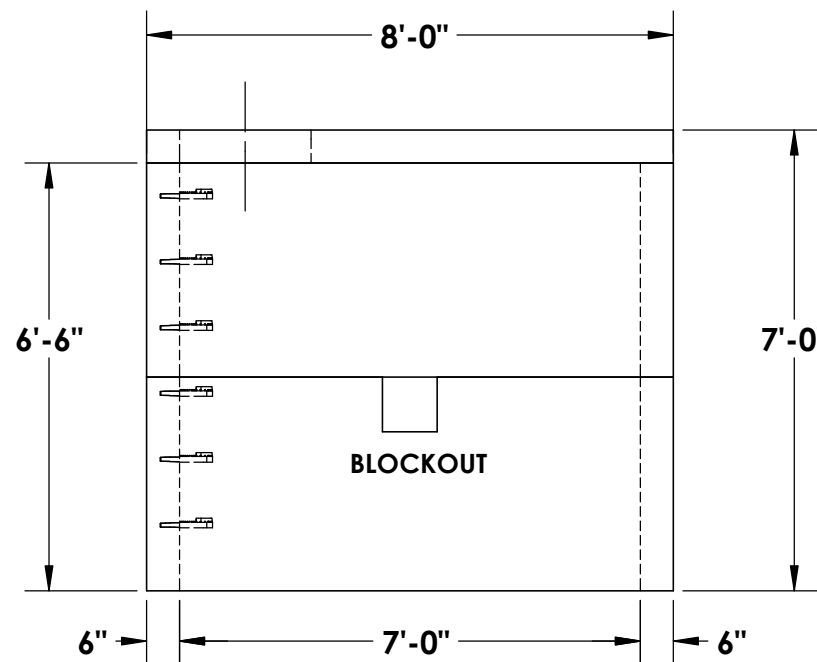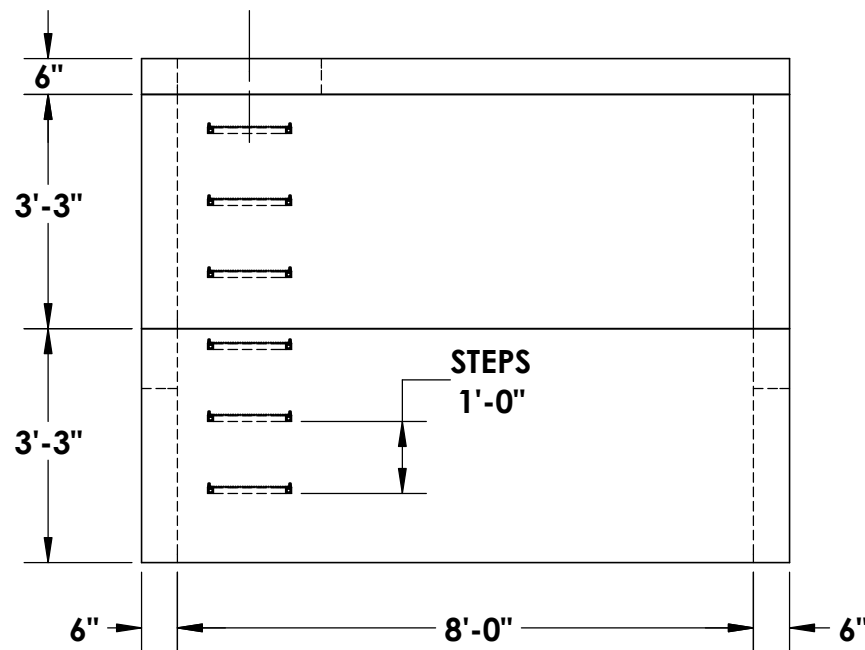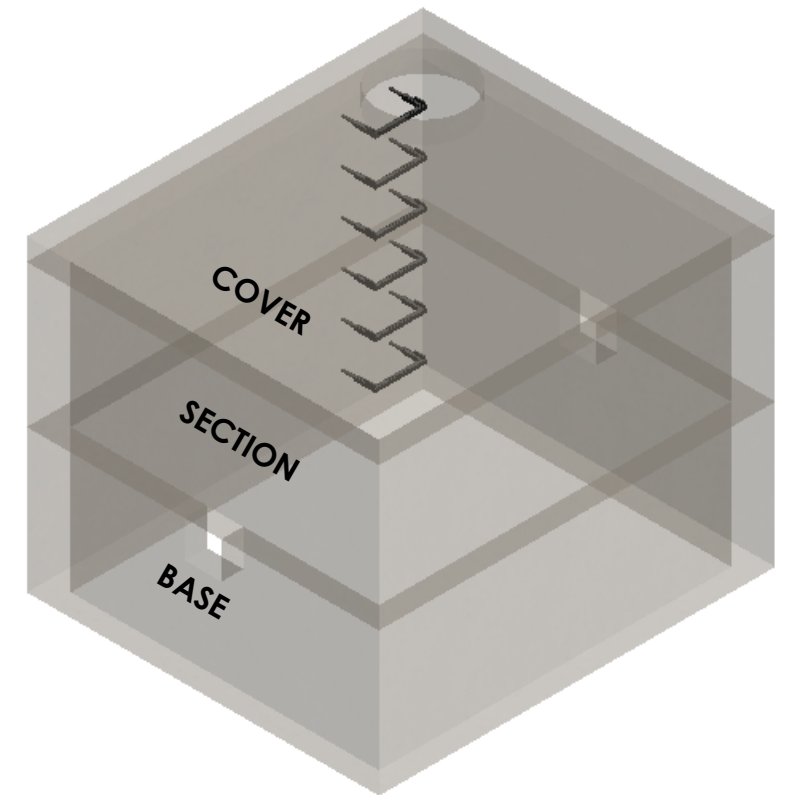

**CONCRETE:**  
4,000 PSI MINIMUM

**REINFORCEMENT:**  
#4 BAR @ 12" O.C.E.W. THROUGHOUT

**BLOCKOUT:**  
SIZES AVAILABLE UPON REQUEST

**\*TRAFFIC RATED (8" THICK) COVER AVAILABLE**

© INLAND NORTHWEST PRECAST



## INLAND NORTH WEST PRECAST

5516 NORTH STARR RD PO BOX 610, NEWMAN LAKE, WA 99025 (509) 226-5050



ALL UTILITY VAULTS MEET AND ARE  
CONSTRUCTED IN ACCORDANCE  
WITH ASTM C858