







4,000 GALLON GREASE INTERCEPTOR

***CONCRETE
5,000 PSI MIN.**

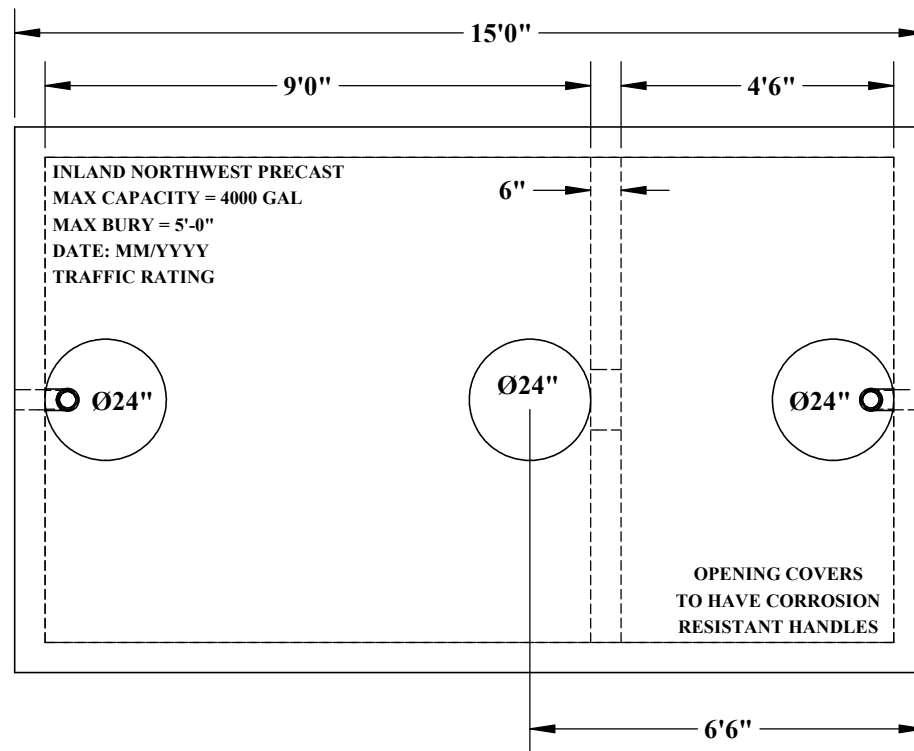

WEIGHTS:

- ~ LID - 12,125# (2.99 CU/YDS)
- ~ WALL - 25,075# (6.19 CU/YDS)
- ~ BASE - 9,695# (2.39 CU/YDS)

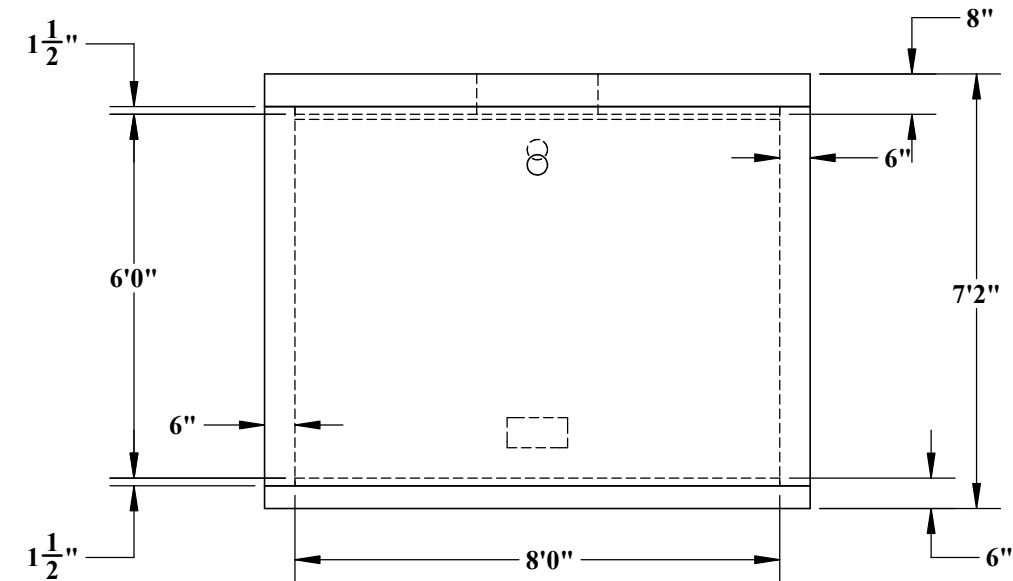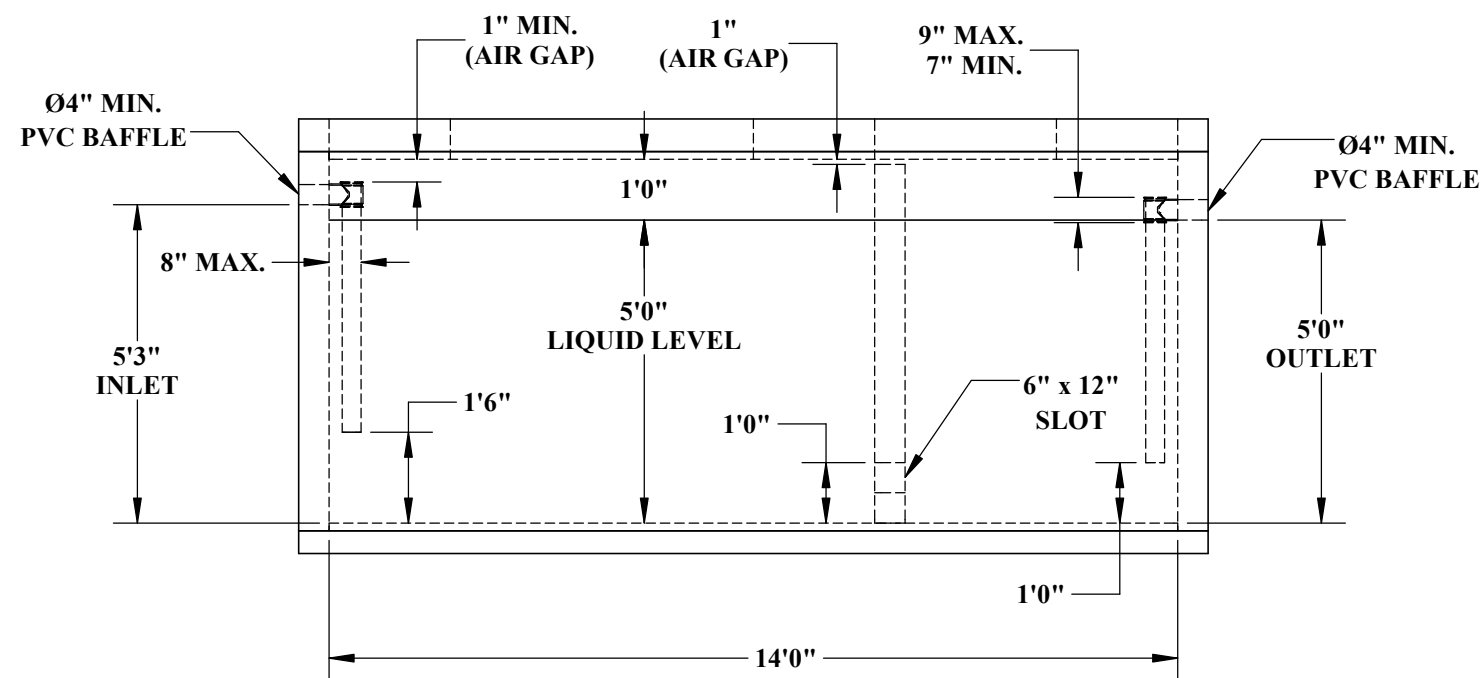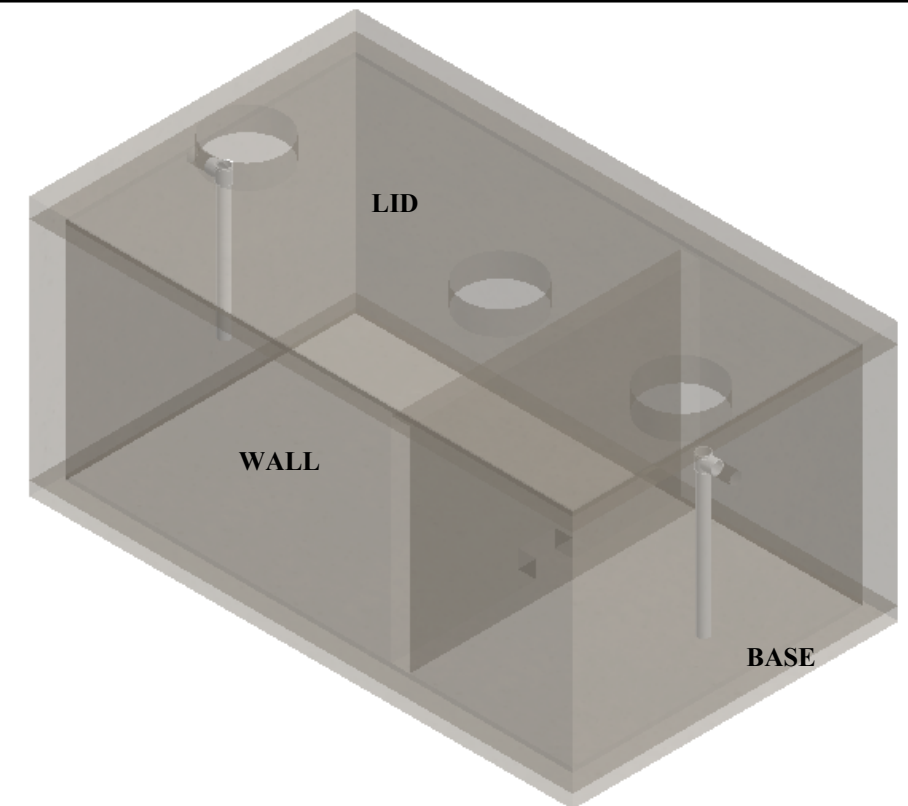

5204 NORTH STARR RD
NEWMAN LAKE, WA 99025
(509) 226-5050
www.inwprecast.com



REINFORCEMENT

- | | |
|---------------------------------------|--------------------------------------|
| ~ LID | ~ WALL |
| SHORT - #5 BAR @ 6" O.C. | SHORT - #4 BAR @ 12" O.C. HORIZONTAL |
| LONG - #5 BAR @ 12" O.C. | LONG - #4 BAR @ 6" O.C. VERTICAL |
| OPENINGS - (4) #5 DIAGONAL BARS, TYP. | |
| ~ BAFFLE WALL | |
| SHORT - #4 BAR @ 12" O.C. | |
| LONG - #4 BAR @ 7" O.C. | |
| ~ BASE - #4 BAR @ 8" O.C.E.W. | |

**INLAND NORTHWEST PRECAST
IDAHO & WASHINGTON**
**ENGINEERING AVAILABLE UPON REQUEST*