







7'-0" x 8'-0" UTILITY VAULT

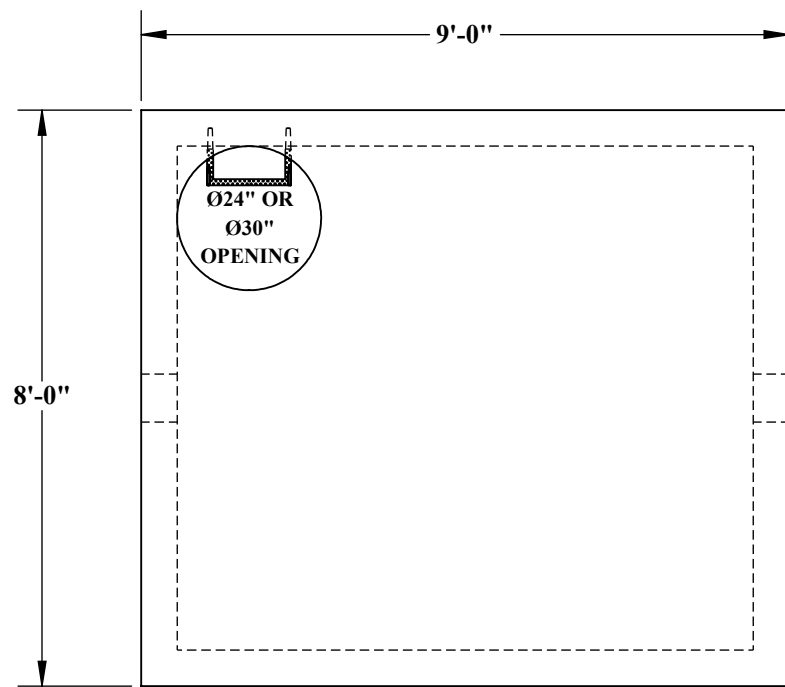

~ LID
- 6,890# (1.70 CU/YDS)

~ WALLS
- 7,800# (1.93 CU/YDS)

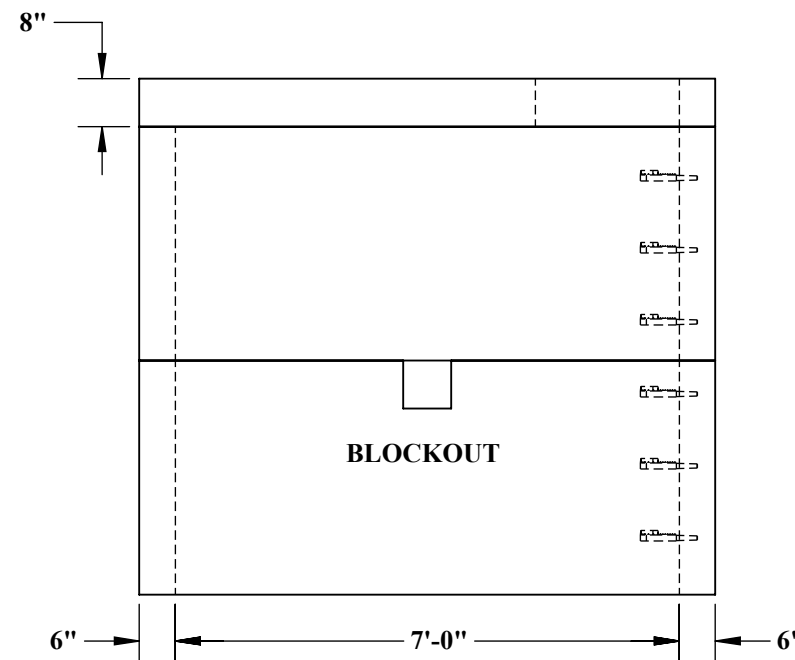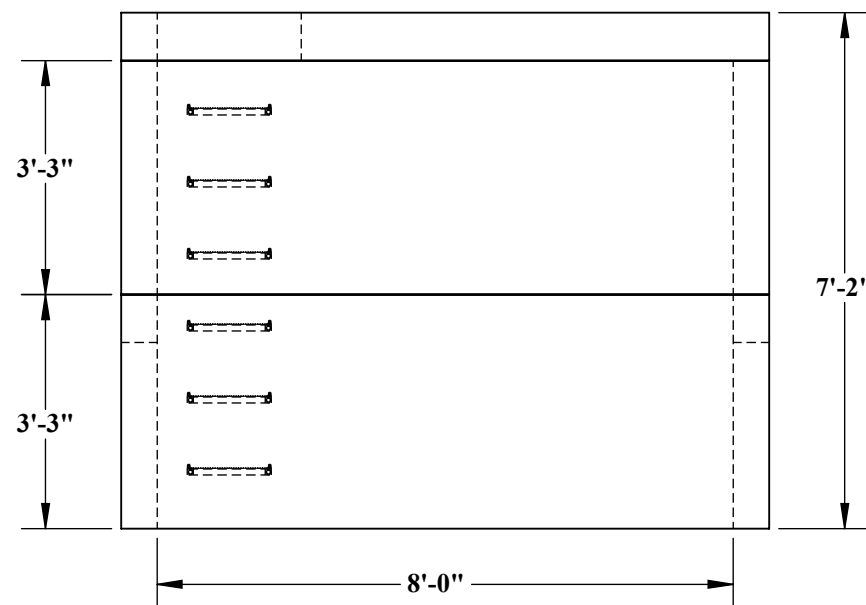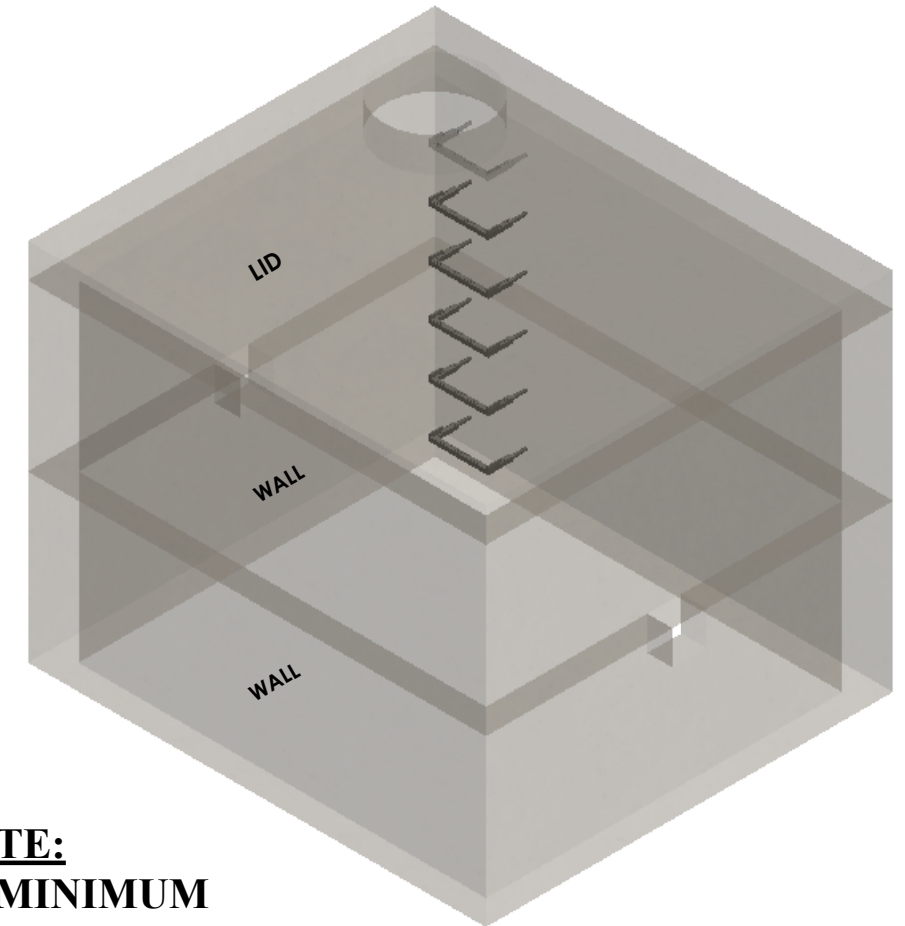

CONCRETE:
4,000 PSI MINIMUM

REINFORCMENT:
LID - #5 @ 5" O.C.E.W
WALLS - #4 @ 9" O.C VERTICAL
#5 @ 6" O.C HORIZONTAL

BLOCKOUT:
SIZES AVAILABLE UPON REQUEST



5204 NORTH STARR RD PO BOX 610
NEWMAN LAKE, WA 99025
(509) 226-5050
www.inwprecast.com



*ALL UTILITY VAULTS MEET
AND ARE CONSTRUCTED IN
ACCORDANCE WITH
ASTM C858